

# ENERGY STORAGE



# SYSTEM

家用儲能機

XINYU DEVELOPMENT

# ESS



## INV PARAMETERS x 1 SET

---

AC OUT Power 6kW (MAX)

AC IN Power (AC110V/220V 60Hz)

AC OUT (AC110V/AC220V 60Hz)

DC OUT (USB DC5V)

## PV PARAMETERS x 1 SET

---

PV Charging Power 5kW (MAX)

PV Open Voltage 450Vdc (MAX)

PV Charging Current 100A (MAX)

## BATTERY PARAMETERS x 1 ~ 3 SET

---

Battery Charge Power 5.5~16.5kWh

# ENERGY STORAGE SYSTEM




電池拓儲箱

[堆疊數量依客戶需求而定]



底座

86 \* 61 \* 7

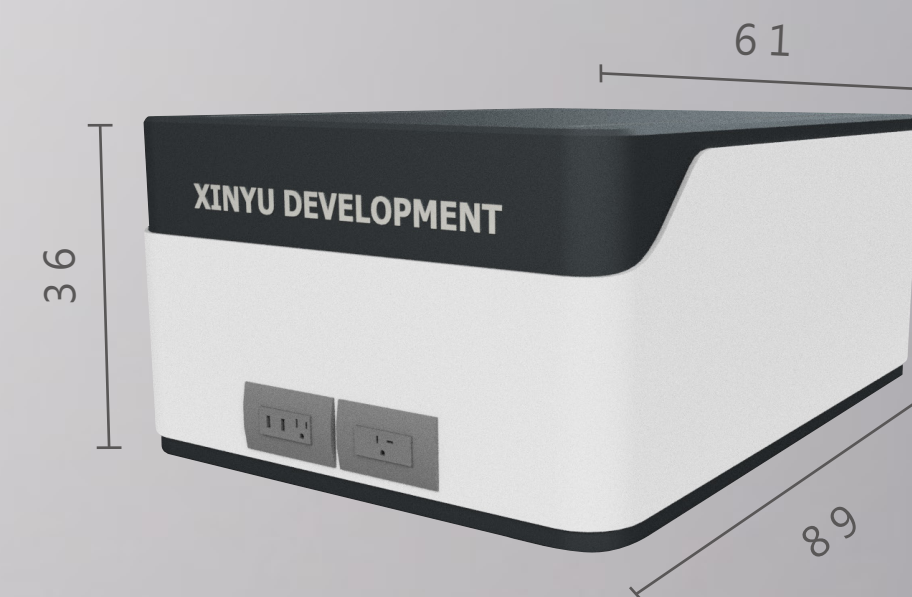


逆變器箱組

單位:cm

# BATTERY

20% 60%


BATTERY CAPACITY

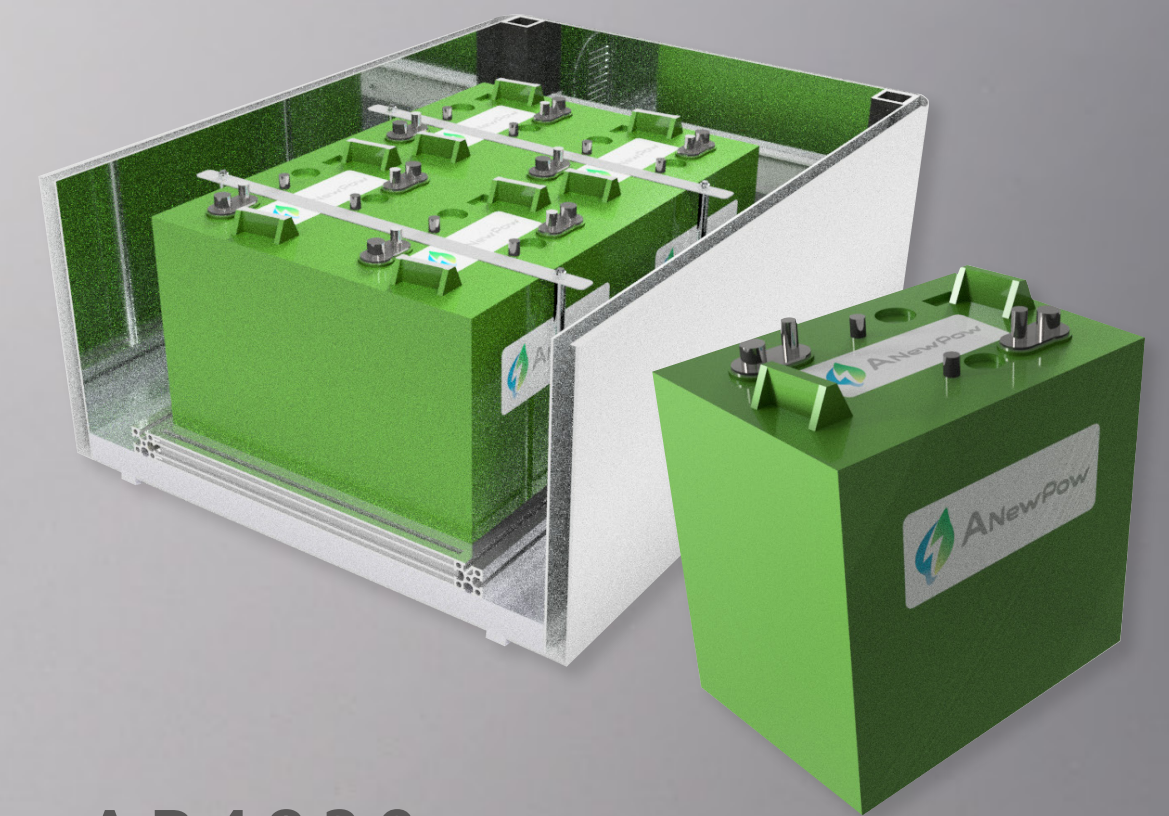

AR4830

內含新銳鋰鐵電池模組 \* 4

# INVERTER

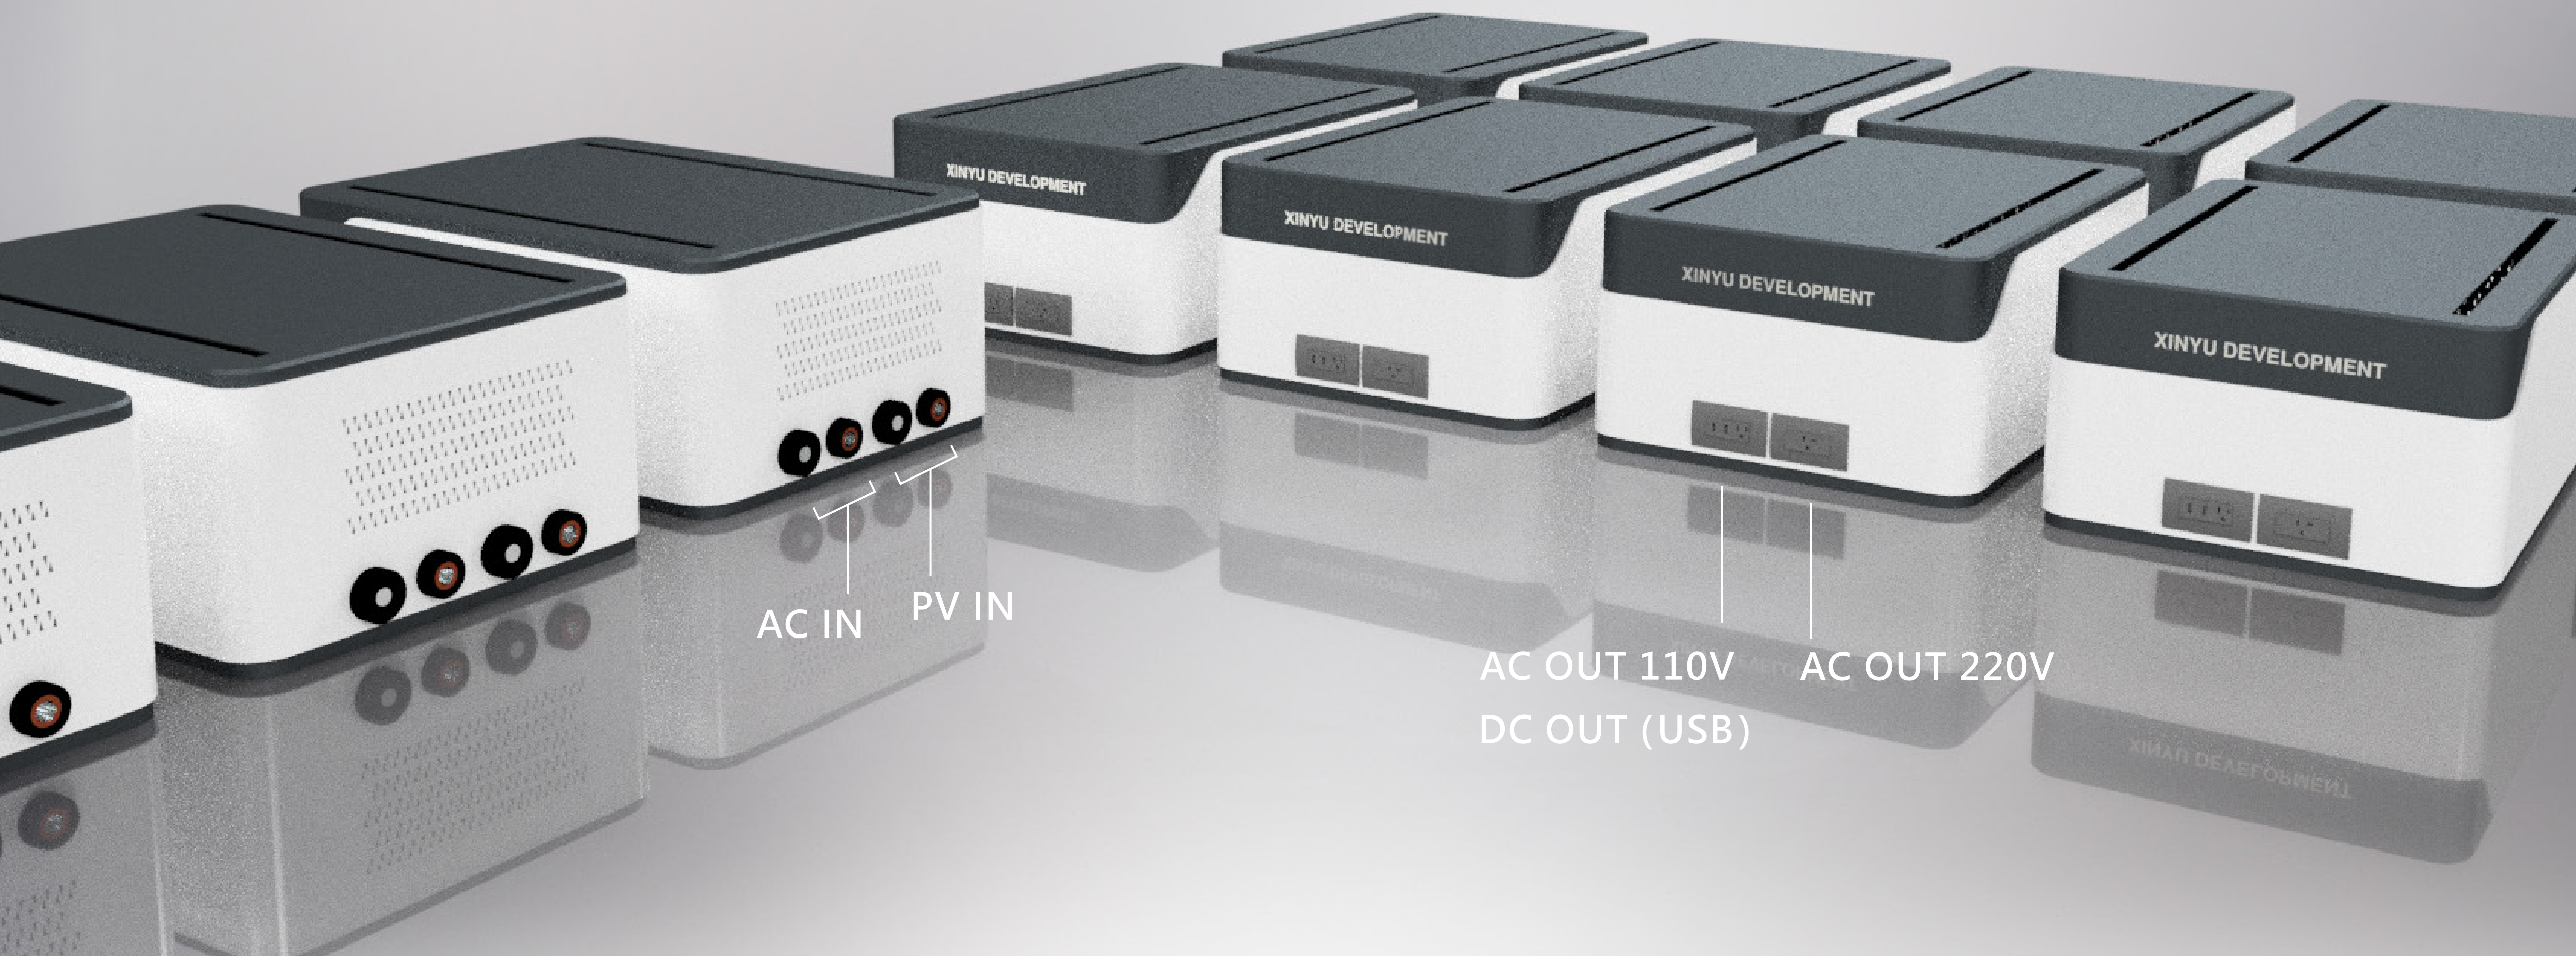

AC IN

PV IN

AC OUT 110V

AC OUT 220V

DC OUT (USB)

ENERGY

STORAGE

SYSTEM

XINYU  
DEVELOPMENT

